




128350450 (09.2020)

Kornmarksvej 1 | DK-2605 Broendby | Denmark | Tel.: (+45) 4323 8100 | www.nilfisk.com


Instructions of use for the Easy series


Caution: Read the instructions before using the machine

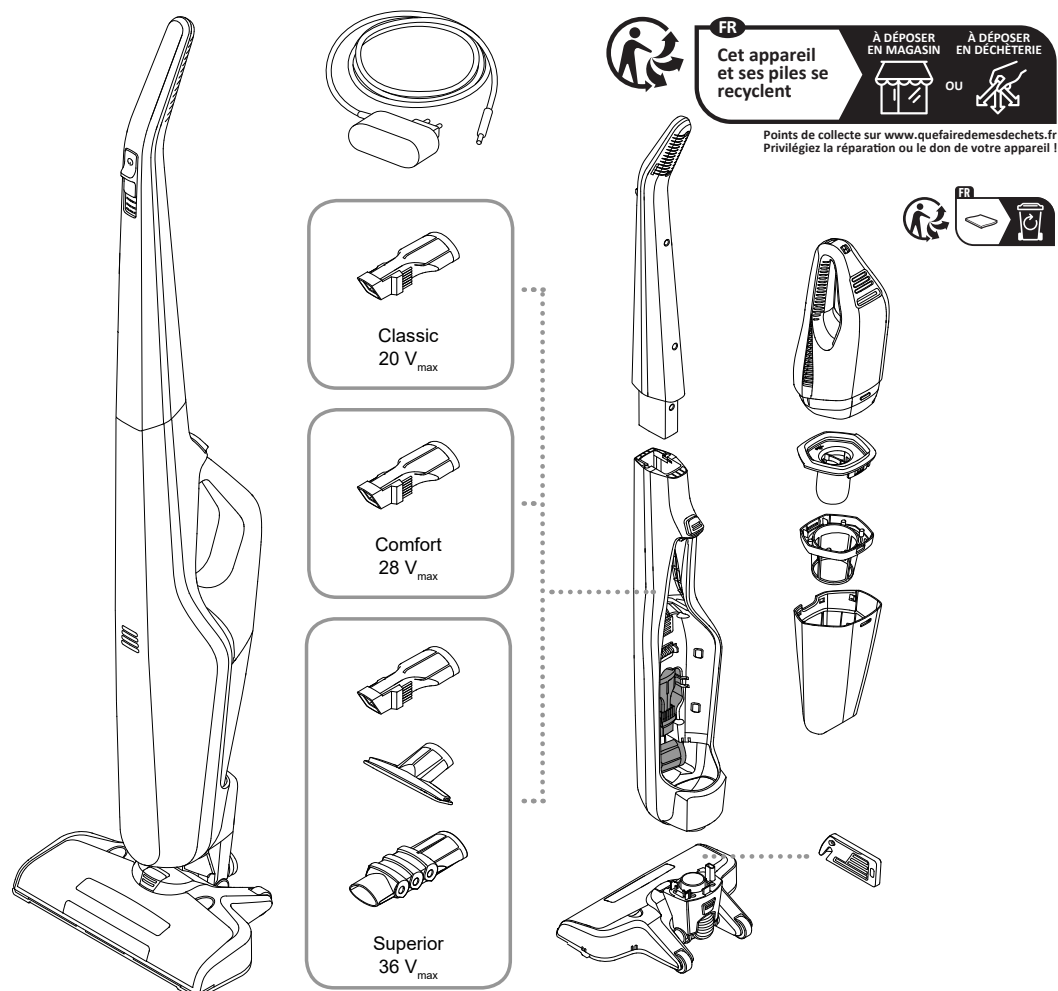








Technical data

Information published	value and precision	unit	20V Max.	28V Max.	36V Max.
Model identifier			MC2108B series	MC2508B series	MC3805B series
Input voltage	XX	VAC	100-240	100-240	100-240
Input AC frequency	XX	Hz	50-60	50-60	50-60
Output voltage	X.X	VDC	21,0	29,0	37,0
Output current	X.X	A	0,8	0,8	0,5
Output power	X.X	W	16,8	23,2	18,5
Average active efficiency	X.X	%	85,0%	88,4%	85,0%
Efficiency at low load (10 %)	X.X	%	76,0%	83,0%	75,0%
No-load power consumption	X.XX	W	0,09	0,08	0,09











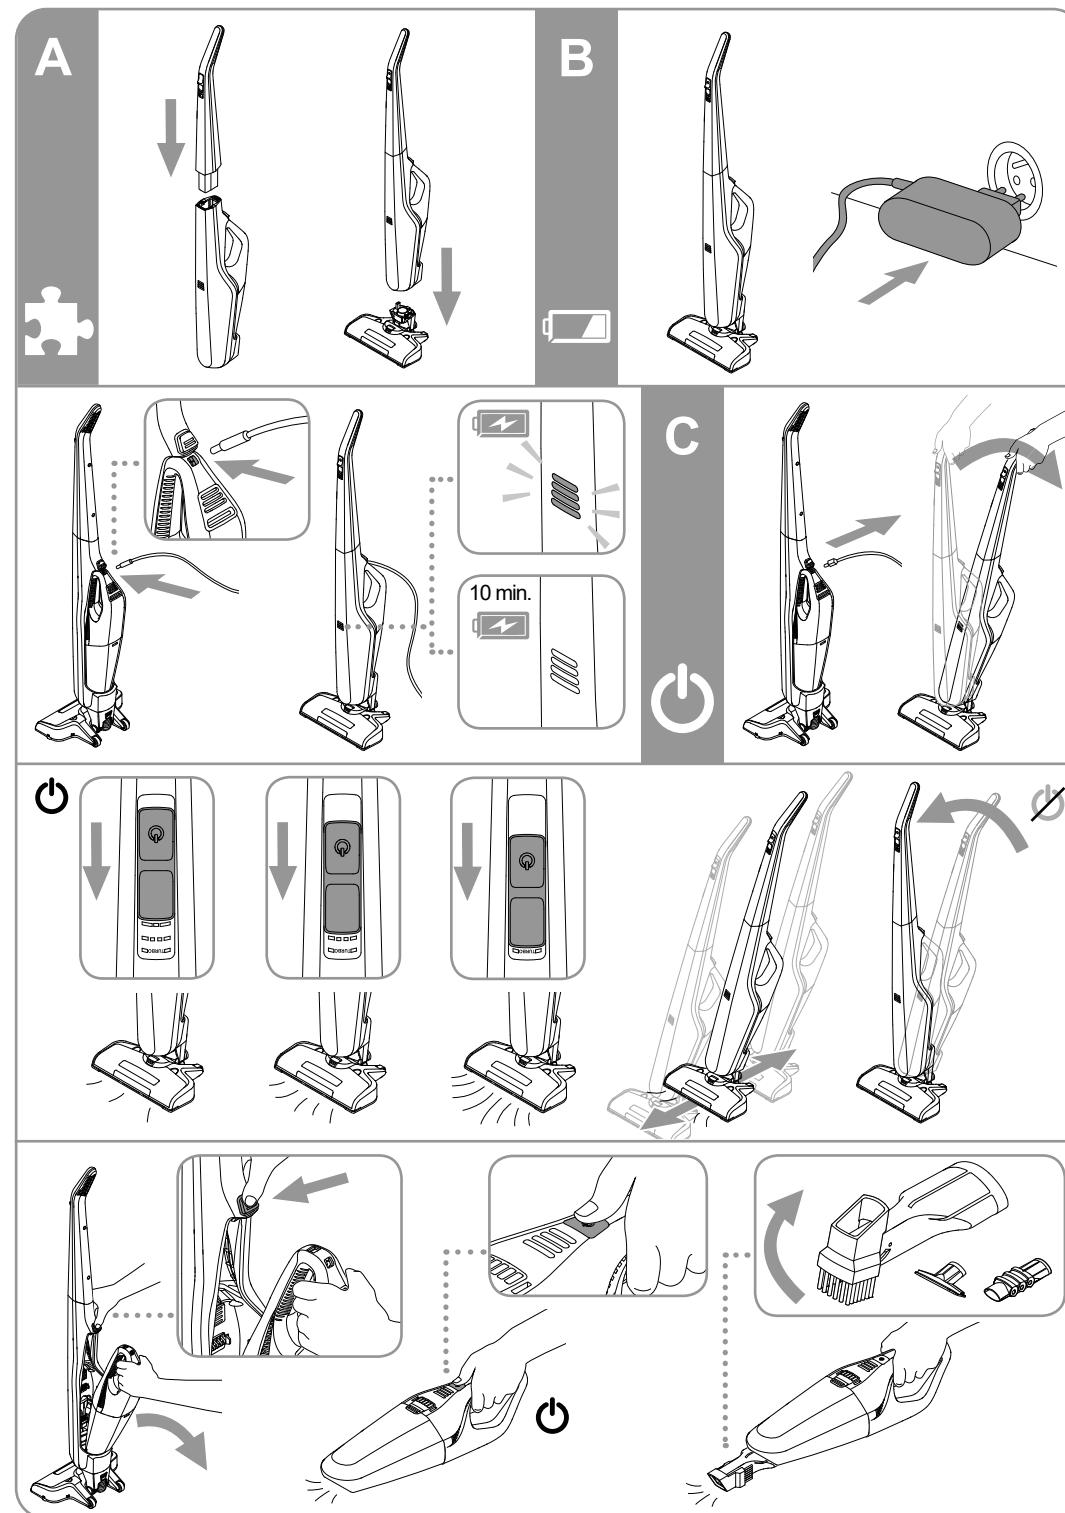


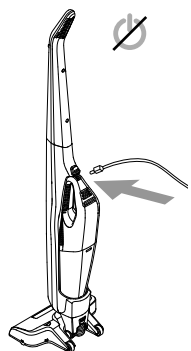





D




E

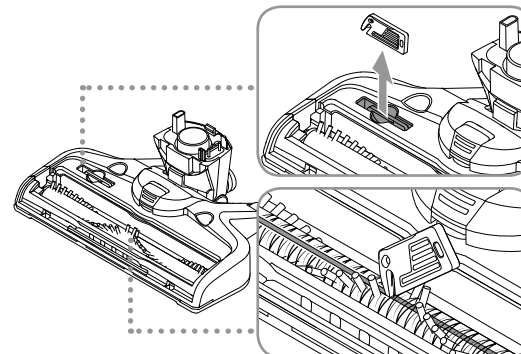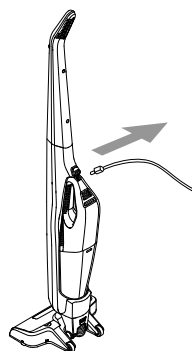


F

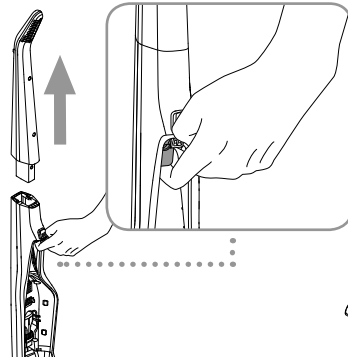

G



6 s.



10 s.

